





# SmartTrim™ for Barco UniSee® Video Walls




Connection  
Assembly:  
Corner



Connection  
Assembly:  
Top, Bottom,  
and Sides



SmartTrim  
Attaches to  
Connection  
Assembly

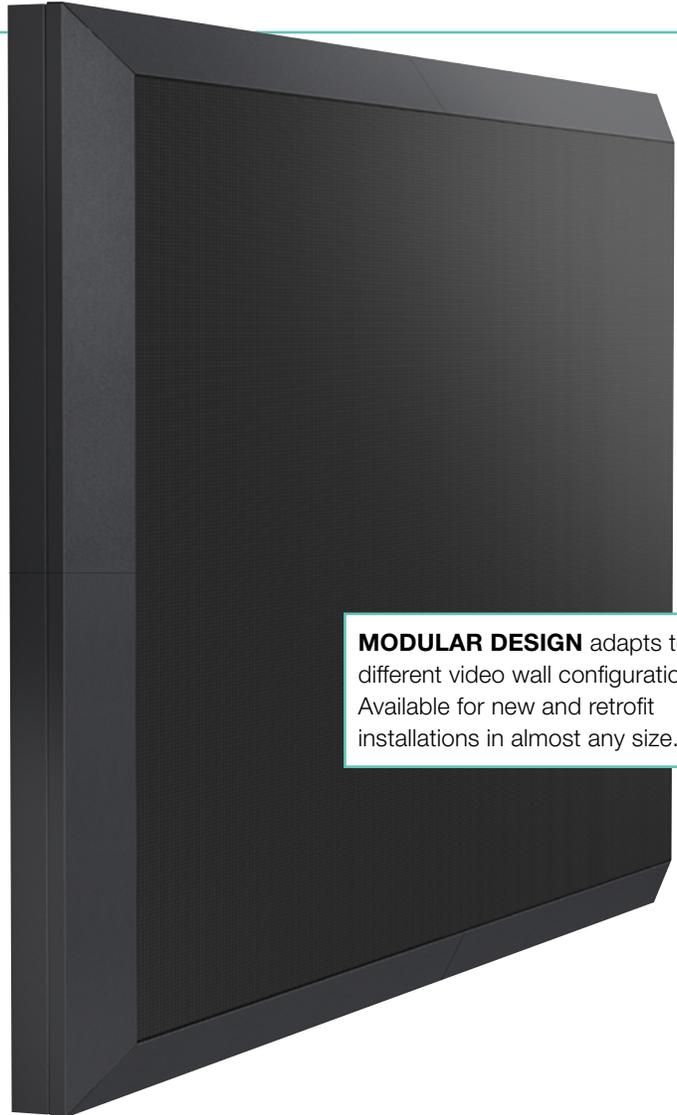

**MODULAR DESIGN** adapts to different video wall configurations. Available for new and retrofit installations in almost any size.

**FOCUSED ON  
INNOVATIVE  
SOLUTIONS**

## Core Audiovisual Solutions

### Modular Trim Solution for Barco UniSee Video Walls

- Patent pending trim solution co-developed with SMS Smart Media Solutions.
- Simple and elegant trim for a wide range of standard and custom configurations.
- Textured matte black finish; optional white and other colors available.
- Easily installed after the Barco UniSee video wall has been mounted.
- Easily removed for quick access to the LCD panels during service.
- Bottom panel flange vented; side/top flanges vented based on configuration.
- For tailored and unique solution needs, contact Draper Custom AV Solutions.
- Design protected.

# SmartTrim™ for Barco UniSee®

Select Barco UniSee video wall configuration on the grid below:

188.2"	1x7	2x7	3x7	4x7	5x7	6x7	7x7
161.3"	1x6	2x6	3x6	4x6	5x6	6x6	7x6
134.4"	1x5	2x5	3x5	4x5	5x5	6x5	7x5
107.6"	1x4	<b>2x4</b>	<b>3x4</b>	<b>4x4</b>	5x4	6x4	7x4
80.7"	1x3	<b>2x3</b>	<b>3x3</b>	<b>4x3</b>	5x3	6x3	7x3
53.8"	1x2	<b>2x2</b>	<b>3x2</b>	<b>4x2</b>	5x2	6x2	7x2
26.9"	1x1	2x1	3x1	4x1	5x1	6x1	7x1
	47.8"	95.6"	143.3"	191.1"	238.9"	286.7"	334.4"

Barco UniSee video wall and SmartTrim are scalable beyond 7 panels x 7 panels.

Other Configuration: \_\_\_\_\_ W x \_\_\_\_\_ H

## RESET GRID

**Bold sizes are standard kits.**  
Trim adds 9.06" (230mm) to overall width and height. Grid dimensions shown are approximate.

### Select Installation Type:

(this will affect the depth of trim flange)

- Directly on wall (0.25" [6.4 mm] gap between flange and wall is standard)
- Offset from wall by 0.75" (19 mm) plywood backing
- Offset from wall by 1.63" (41 mm) Unistrut supports
- Offset from wall by other support structure (signoff drawing required)

Specify additional depth of support structure from wall: \_\_\_\_\_

### Select SmartTrim Panel Length:

- Sectional (standard)

### Select SmartTrim Panel Color:

- Black (standard)
- White
- Other: \_\_\_\_\_

### Specify SmartTrim Panel Ventilation:

(top panels do not include a flange; available by special order if needed)

- Top Flange (if specified, will be vented)
- Top Face Vented (optional)

- Left Flange Vented (optional\*)
- Left Face Vented (optional)



- Bottom Flange Vented (standard)
- Bottom Face Vented (optional)

- Right Flange Vented (optional\*)
- Right Face Vented (optional)

\* Side trim flanges will be vented whenever the video wall array is greater than 3 displays high.

### Specifications - SmartTrim™ for Barco UniSee®

SmartTrim is constructed of 0.08" (2 mm) aluminum and hardware of 11-gauge (3.2 mm thick) steel, with a textured powder coat finish. Available in black, white or optional custom colors. Each trim section extends past the display edge no more than 4.5" (114 mm) once installed. SmartTrim's design allows for smaller packaging, ease of handling by one person during installation and service, and simple expansion when adding more displays.


SmartTrim connection assembly hardware attaches to each Barco UniSee wall cross using the Barco service tool provided with the system. No other are tools are necessary. Trim is easily attached with guiding pins to ensure a proper fit and clicks securely into place with powerful magnets. Trim edges are padded with soft foam to help protect the UniSee displays.

Lower trim panel flanges are vented to allow for convection cooling. Vents are 2.77" x 0.24" (70.4 x 6 mm) with 0.35" (9 mm) spacing between the vent slots. Side trim panel flanges will be vented when the video wall array is greater than three displays high. Top trim panels do not include flanges to allow for maximum air flow, but are available as an option. Please note: it is the installer's responsibility to ensure the Barco UniSee video wall is installed correctly and always operating within Barco's published specifications for ambient conditions.

Standard trim flange depth is based on a flush wall-mount installation and allows for a nominal 0.25" (6.4 mm) gap between the trim and the wall. Standard trim depth is 2.75" (70 mm). If the UniSee video wall installation requires structural mounting support (e.g., plywood backing or Unistrut), additional flange depth will be needed and may be supplied upon request.

**PATENT INFORMATION:** available at [www.draperc.com/legal/patents](http://www.draperc.com/legal/patents)

**DOWNLOADABLE 3-PART SPECIFICATIONS:** available at [www.draperc.com](http://www.draperc.com)

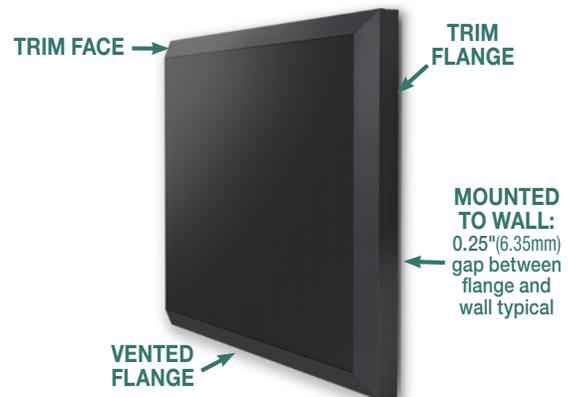

PROJECT: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

CONTRACTOR: \_\_\_\_\_

SUPPLIER: \_\_\_\_\_

DATE: \_\_\_\_\_ REVISED: \_\_\_\_\_



Draper, Inc. | 411 S. Pearl St. Spiceland, IN 47385  
draperinc.com | 765.987.7999 | 800.238.7999

© 2019 All Rights Reserved | FORM: Draper\_SmartTrim\_SpecSheet0419